


Motorized Pulley 500L & 500M, Ø 19.72 in. (501 mm)

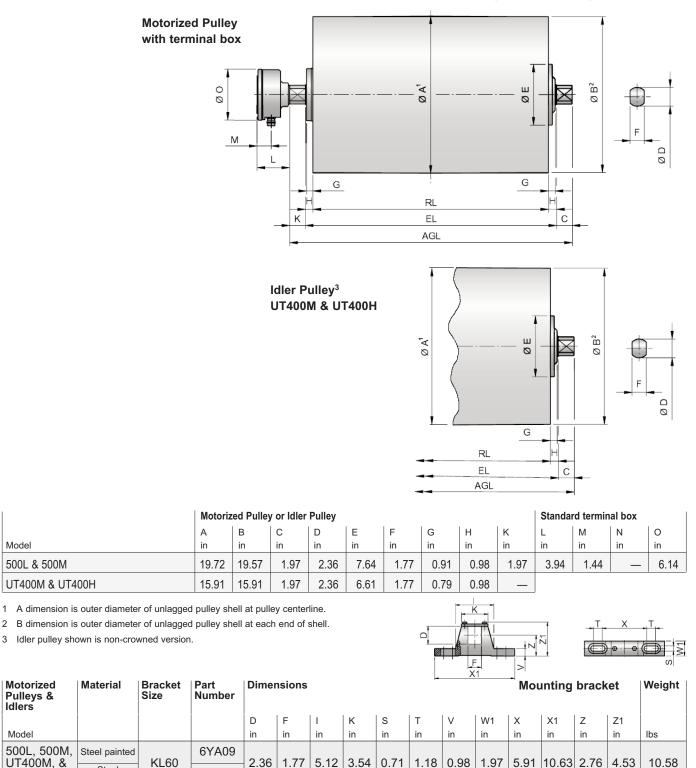

Steel Ni plated

6YA0D

Model

500L & 500M

Motorized

Pulleys &

500L, 500M,

UT400M, &

UT400H


Idlers


Model

UT400M & UT400H



Motorized Pulley 500H, Ø 19.72 in. (501 mm)

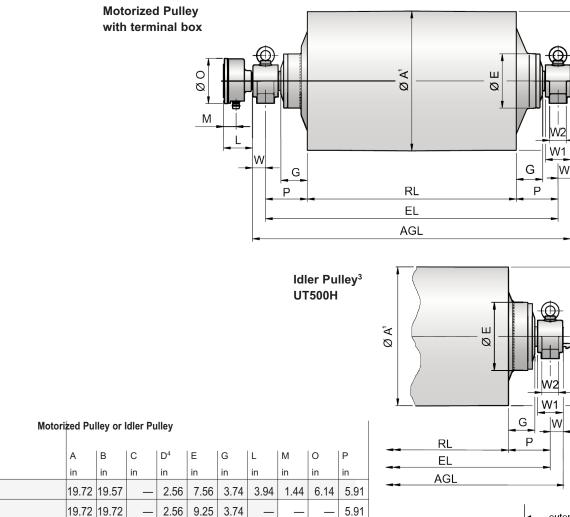



Mounting bracket*

Motorized Pulleys	Material	Bracket	Dimensions											
& Idler Pulleys		Size*	D	1	S	V	W	W1	W2	Х	X1	Z	Z1	í
Model			in	in	in	in	in	in	in	in	in	in	in	lbs
500H & UT500H	Cast iron	AL65 / ALO65	2.56	4.53	0.91	1.34	1.85	3.54	2.36	7.09	9.45	3.15	5.55	17.64

* Type AL bracket has gib key. Type ALO has no gib key. See position 69 on page 56.

1 A dimension is outer diameter of unlagged pulley shell at pulley centerline.

2 B dimension is outer diameter of unlagged pulley shell at each end of shell.

3 Idler pulley shown is non-crowned version.

D dimension is shaft diameter.

Model

500H

4

UT500H

ъ

Ø

ñ

Ø