





Motorized Pulley 400L, 400M & 400H, Ø 15.91 in. (404 mm)

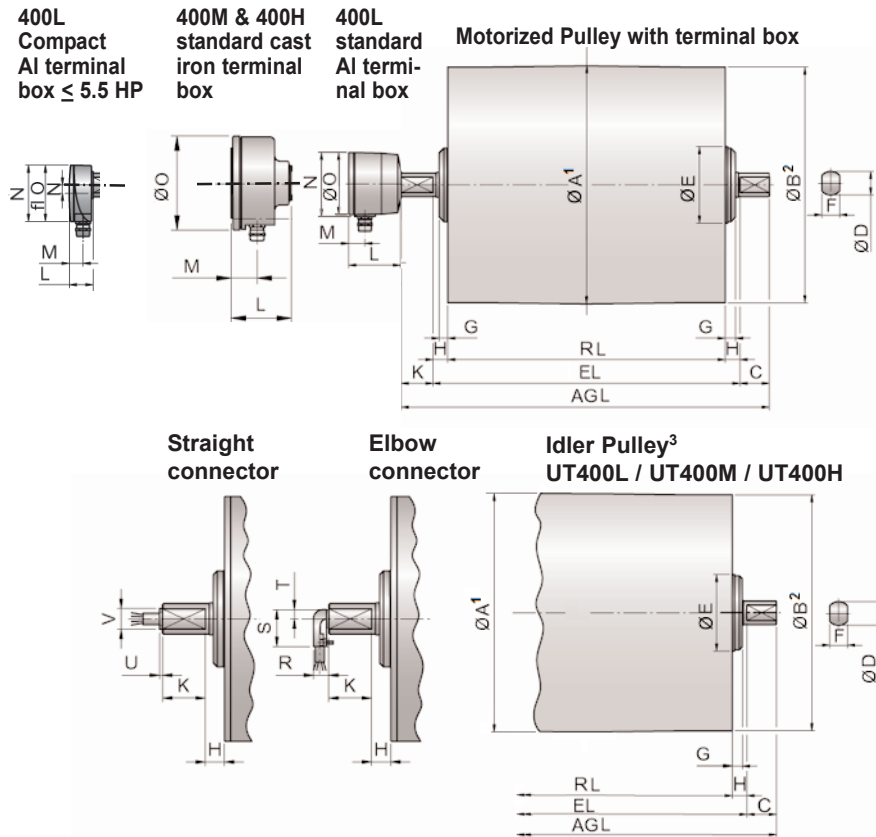

Model	Motorized Pulley or idler Pulley									Standard terminal box				Compact terminal box ≤5.5 HP				Straight connector ≤ 5.5 HP		Elbow connector ≤ 5.5 HP		
	A in	B in	C in	D in	E in	F in	G in	H in	K in	L in	M in	N in	O in	L in	M in	N in	N1 in	U in	V in	R in	S in	T in
400L	15.91	15.75	1.97	1.57	4.92	1.18	0.79	0.98	2.13	3.43	1.06	4.21	4.13	1.61	0.95	3.74	0.55	0.16	1.06	0.79	1.89	0.47
400M & 400H	15.91	15.75	1.97	2.36	7.64	1.77	0.91	0.98	1.97	3.94	1.44	-	6.14	3.94	1.44	-	-	-	-	-	-	-
UT400L	15.91	15.91	1.97	1.57	4.92	1.18	0.67	0.98	-	-	-	-	-	-	-	-	-	-	-	-	-	-
UT400M & UT400H	15.91	15.91	1.97	2.36	6.61	1.77	0.79	0.98	-	-	-	-	-	-	-	-	-	-	-	-	-	-

- 1 A dimension is outer diameter of unlagged pulley shell at pulley centerline.
- 2 B dimension is outer diameter of unlagged pulley shell at each end of shell.
- 3 Idler pulley shown is non-crowned TS9N/TS11N version with regreasable seals.

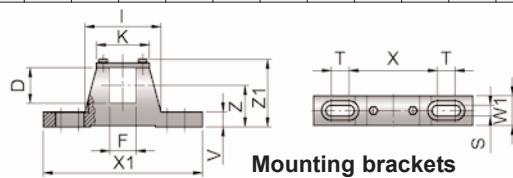

Motorized Pulleys	Material	Bracket Size	Part Number	Dimensions													Weight
Model				D in	F in	I in	K in	S in	T in	V in	W1 in	X in	X1 in	Z in	Z1 in	lbs	
400L	Steel painted	KL4-HD	6YA0K	1.57	1.18	3.31	2.44	0.55	0.79	0.87	1.57	4.33	7.48	1.97	3.27	4.63	
	Steel Ni plated		6YA0W														
	Stainless steel		6YA0U														
400M & 400H	Steel painted	KL60	6YA09	2.36	1.77	5.12	3.54	0.71	1.18	0.98	1.97	5.91	10.63	2.76	4.53	10.58	
	Steel Ni plated		6YA0D														